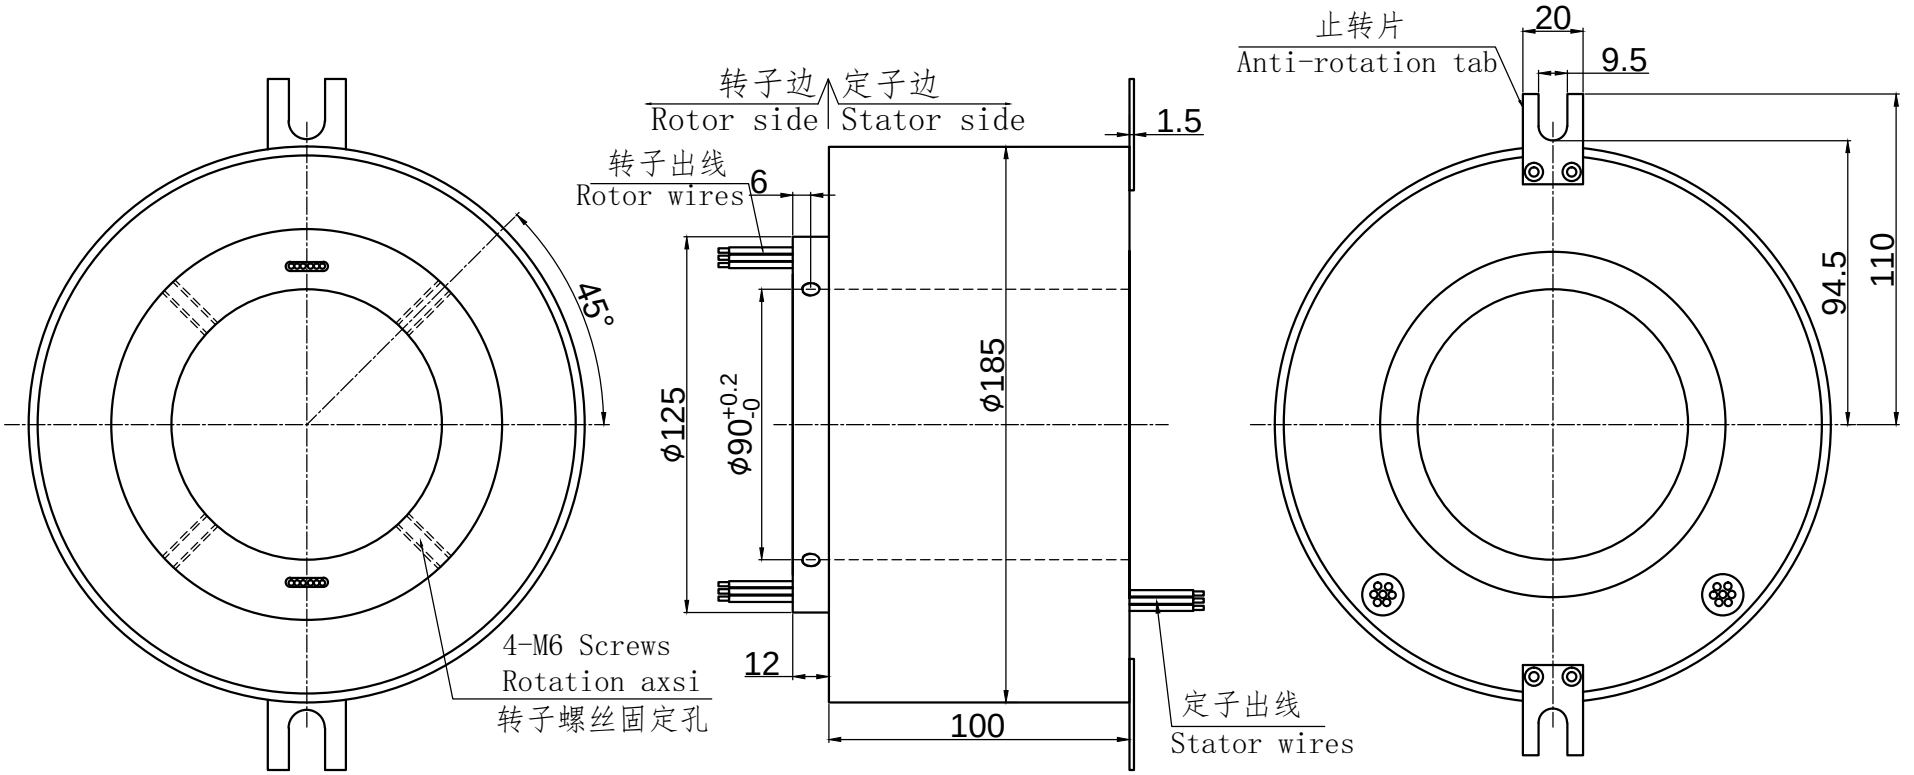


Speed	0-200/rpm
Wroking Temperature	-30℃ +80℃
Shell Material	SUS304
Probedion level	IP65
Current	5A/10 channels
Voltage	0-220V
Insulation Resistance	≥500MΩ/300VDC
Dielectric Strength	300VAC@50Hz, 60S
Dynamic resistance	＜10mΩ
Wire specifcation	22AWG Teflon Wire
Wire Length	300mm
Contact Material	Precious metal

AF200-22AWG Teflon Wire*10
5A/10 channels

1	2	3	4	5	6	7	8	9	10
BK	BN	RD	OG	YE	GN	BU	PL	GY	WH

5A/10 channels				Name	Outline Drawing		
				Product Model	FS90185-10P05-E0107		
View		Units	mm	Design		Date	2026.2.26
Versions	A/0	Scale	1:1	Audit		Date	

This drawing is owned by ShenZhen Guren Technology Co.,LTD.Any unit ro individual shall not use or copy without permission,otherwise they will be held legally responsible.

谷仁 GUREN

ShenZhen Guren Technology Co.,LTD