

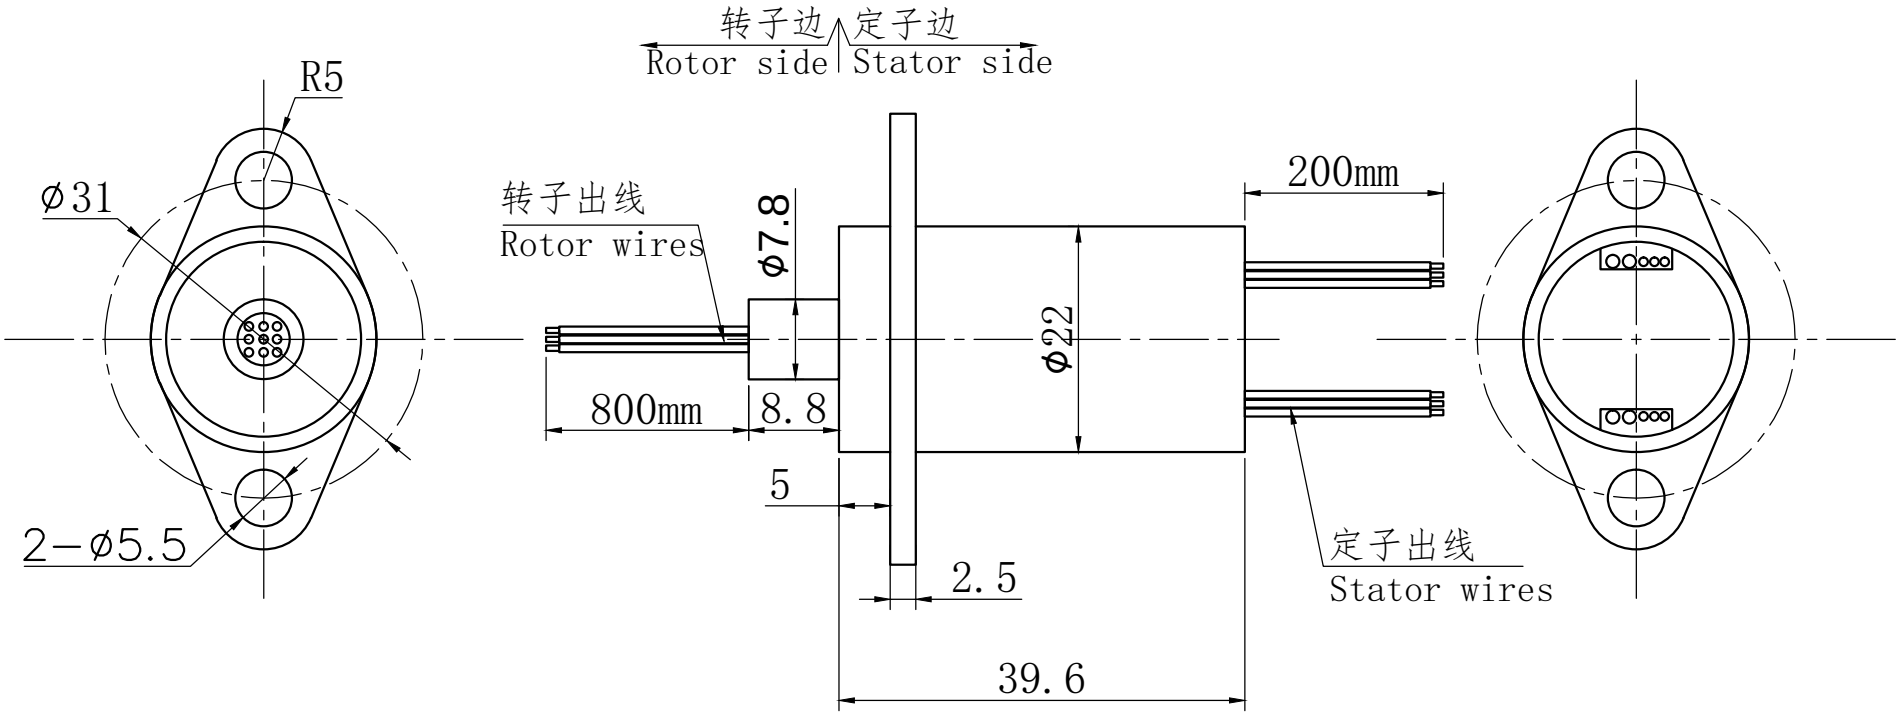


Speed	0-250/rpm
Wroking Temperature	-30℃ +80℃
Shell Material	Engineering plastics
Probedion level	IP51
Current	10 channels
Voltage	24V
Insulation Resistance	≥1000MΩ/500VDC
Dielectric Strength	200VAC@50Hz, 60S
Dynamic resistance	＜10mΩ
Wire specifcation	see wiring diagram
Rotor connection	800mm
Stator connection	200mm
Contact Material	Precious metal

AF200-20AWG Teflon Wire*4
5A/4 channels



AF200-26AWG Teflon Wire*6
1A/6 channels



10 channels				Name	Outline Drawing		
				Product Model	WX22-10P-E0089		
View		Units	mm	Design		Date	2026.3.28
Versions	A/0	Scale	1:1	Audit		Date	

This drawing is owned by ShenZhen Guren Technology Co.,LTD.Any unit ro individual shall not use or copy without permission,otherwise they will be held legally responsible.

谷仁 GUREN

ShenZhen Guren Technology Co.,LTD